


HOW TO


Modify QuattroPlow to Accept Steel Wing Cutting Edges




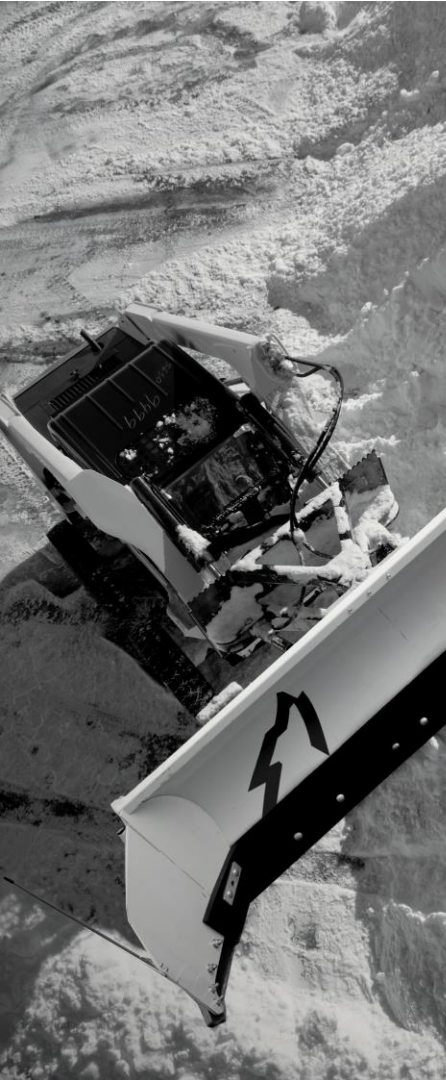


Step 1


First, determine if your plow has old style (3-hole) or new style (4-hole) sideplates, as shown.

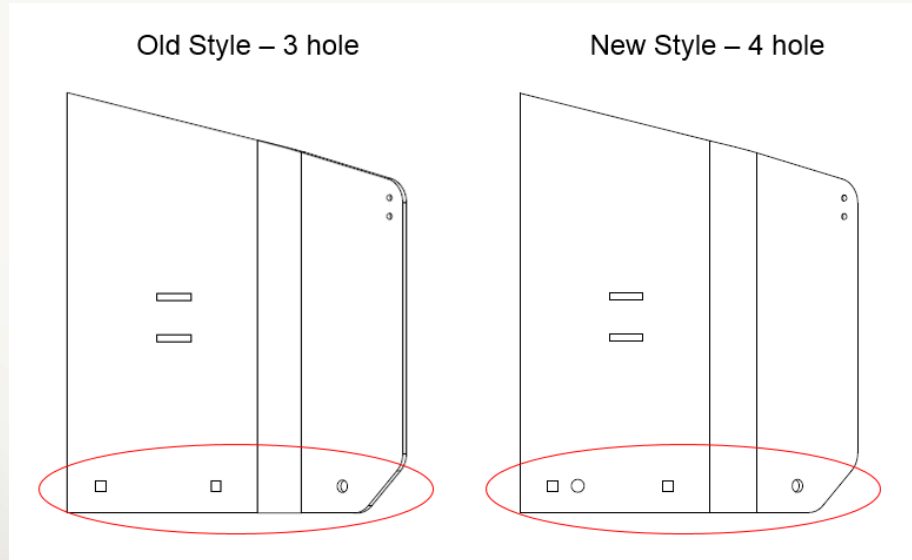

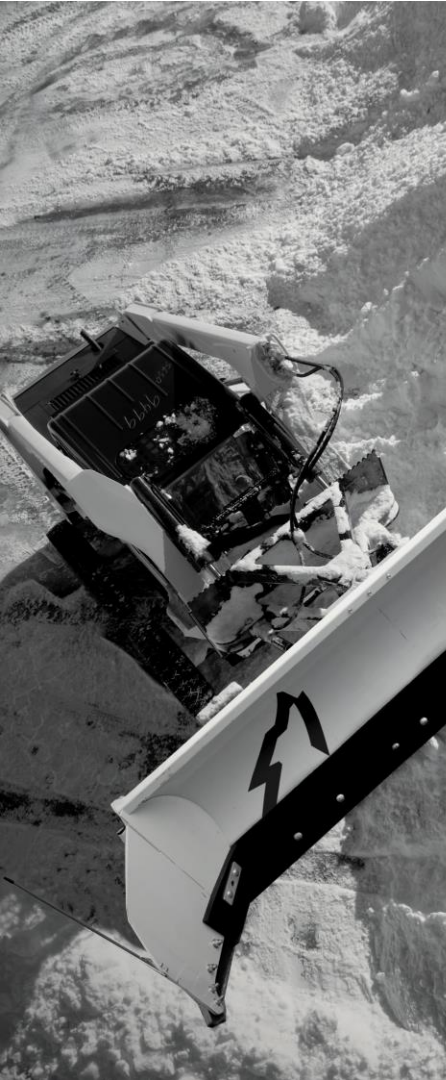


For Old Style (3-hole) Sideplates

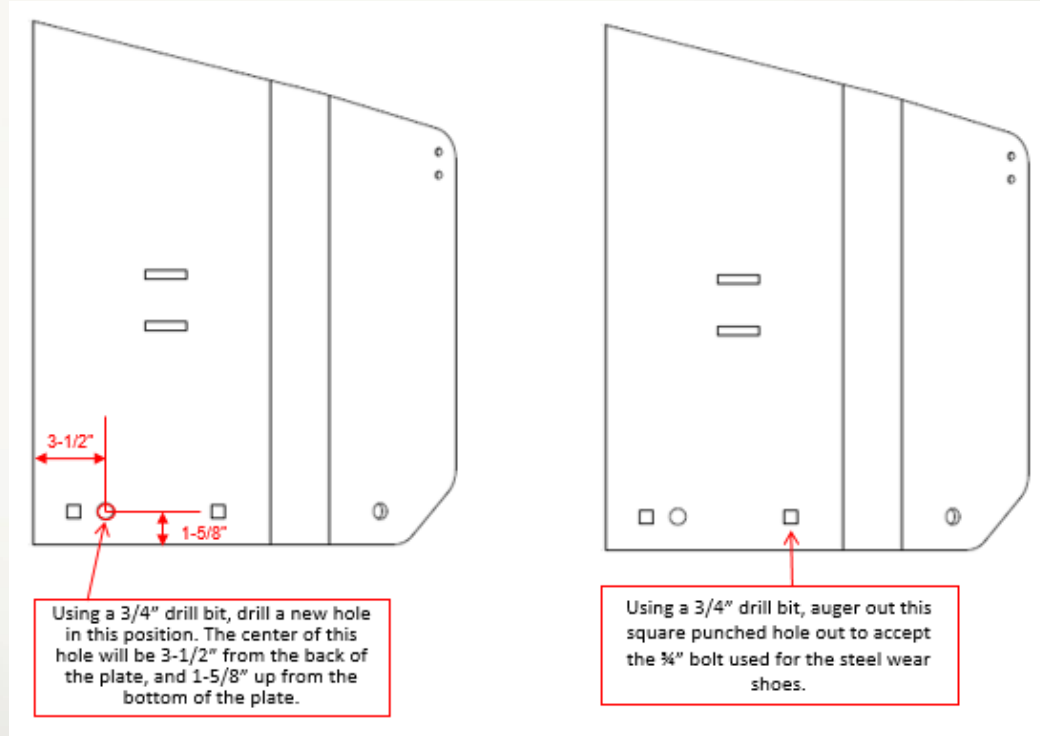

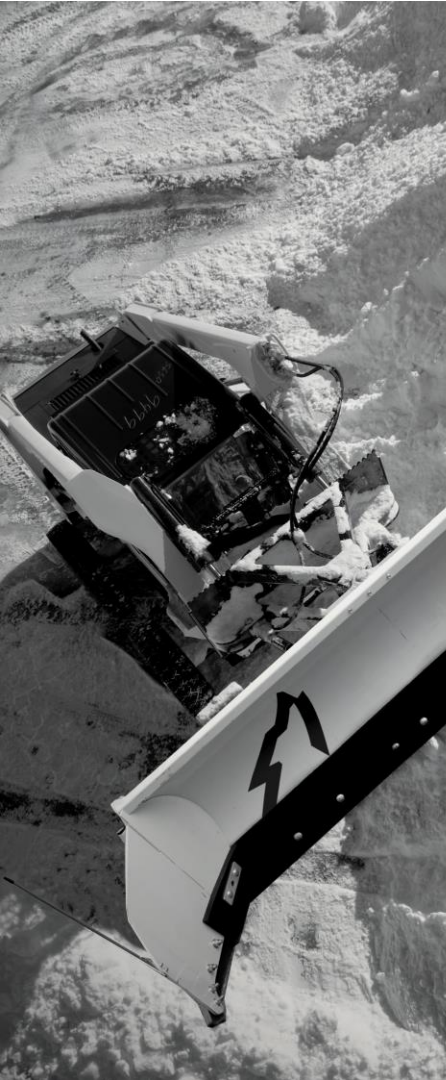

For New Style (4-hole) Sideplates

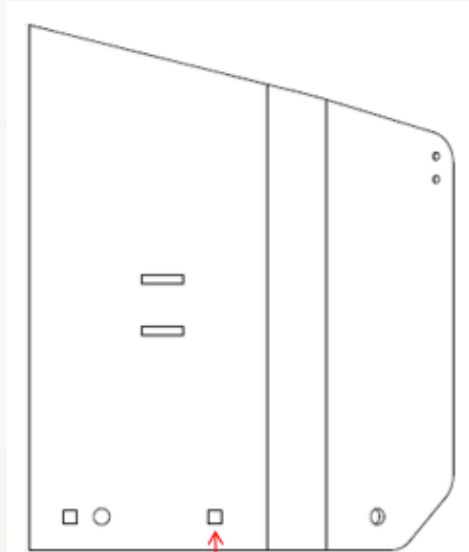

Using a 3/4" drill bit, auger out this square punched hole out to accept the 3/4" bolt used for the steel wear shoes.

LEAD YOUR PACK

