


# AutoWingPlow Specifications

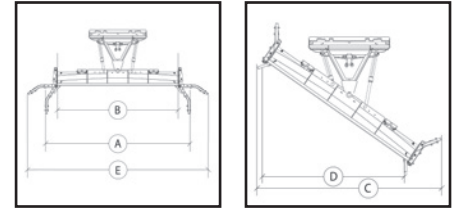

FOR MACHINES WEIGHING	QuattroPlow™ 6,000-14,000 lbs.					QuattroPlowHD™ 14,000-30,000 lbs.	
	QP-102	QP-114	QP-126	QP-138	QP-150	QPHD-146	QPHD-170
<b>Model Number</b>	QP-102	QP-114	QP-126	QP-138	QP-150	QPHD-146	QPHD-170
<b>Blade Width (A)</b>	102" (8'-6")	114" (9'-6")	126" (10'-6")	138" (11'-6")	150" (12'-6")	145" (12'-2")	170" (14')
<b>Moldboard Width (B)</b>	84" (7.0')	96" (8.0')	108" (9.0')	120" (10.0')	132" (11.0')	120" (10.0')	144" (12.0')
<b>Overall Width at Full Angle (C)</b>	93.9"	103.9"	113.9"	123.9"	133.9"	127"	147"
<b>Clearing Width at Full Angle (D)</b>	69.8"	79.8"	89.8"	99.8"	109.8"	100"	120"
<b>Clearing Width at Wide Angle (E)</b>	130"	142"	154"	166"	178"	176"	200"
<b>Blade Height</b>	30"	30"	30"	30"	30"	38"	38"
<b>Weight (lbs.) (actual-not ship weight)</b>	1,032	1,074	1,116	1,178	1,220	2,855	3,152
<b>Moldboard Gauge</b>	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.	10 Ga.
<b>Trip Springs</b>	4 Ext.	4 Ext.	4 Ext.	4 Ext.	4 Ext.	8 Ext.	8 Ext.
<b>Wear Shoes</b>	Opt.	Opt.	Opt.	Opt.	Opt.	N/A	N/A
<b>Moldboard Cutting Edge</b>	5/8" x 6" Reversible High Carbon Standard, Carbide Optional					3/4" x 8" top punch	
<b>Angle Rams</b>	2" x 13" Nitro Steel UltraMAX					2" x 13" D/A Nitro Steel*	
<b>Vertical Ribs</b>	6	6	6	8	8	8	10
<b>Moldboard Radius</b>	14"	14"	14"	14"	14"	19"	19"
<b>Full Down Pressure</b>	Yes	Yes	Yes	Yes	Yes	Yes	Yes
<b>Universal Skid Steer Compatible</b>	Standard					N/A	
<b>Crossover Relief Valve</b>	Standard					Standard	
<b>Side Plate Thickness</b>	3/8" Grade 50					5/8" Grade 50	
<b>Side Plate Wear Shoes</b>	1" High Density Urethane					AR-400 Floating	
<b>Side Plate Hinge Pin</b>	1 3/8" x 21-1/2"					1-7/8" x 29-3/4"	
<b>Side Plate Cylinder</b>	Double Acting, Chrome Plate Rod					2-1/2" x 8"	
<b>PowerWing Upgrade</b>	Optional						

\* Double Acting Cylinder